

Tigerwood

SPECIFICATIONS

ITEM NUMBER	ENGTW71/2
THICKNESS	5/8" (16mm)
WIDTH	7.1/2" (190.5mm)
LENGTH	1 - 7'
GLOSS	8%
WEAR LAYER	3mm
CONTENT OF BOX	27,07 sqft
INSTALLATION	STAPLE, GLUE, FLOAT

APPLICABLE STANDARDS

Adherence - At least 3 B (as standard norm ASTM D 3359 - 02);
 Glue Bond (ANSI/HPVA EF 2002);
 Formaldehyde emission - Less than 0.01ppm (ASTM D 6007 -2);
 Total VOC (CA Specification 01350) - ≤ 0.5 mg/m3;
 Critical radiant flux (Class 1) - 0,45watts/cm² (ASTM E648)



CONTACT US!

Phone : +1 (757) 420 4771
 Fax : +1 (757) 420 4772
 Email : sales@triangulo.com.br

Know more,
 click here:



triangulo.us


Tigerwood

SPECIFICATIONS

ITEM NUMBER	ENGTW51/4	ENGTW31/4 L	ENGTW31/4
THICKNESS	1/2" (12mm)	1/2" (12mm)	3/8" (9.5mm)
WIDTH	5.1/4" (131mm)	3.1/4" (82.55mm)	3.1/4" (82.55mm)
LENGTH	1' - 7'	1' - 7'	1' - 4'
GLOSS	30%	30%	30%
WEAR LAYER	3mm	3mm	3mm
CONTENT OF BOX	31.02 sqft	29.32 sqft	19.52 sqft
INSTALLATION	STAPLE, GLUE, FLOAT	STAPLE, GLUE, FLOAT	STAPLE, GLUE, FLOAT

APPLICABLE STANDARDS

Adherence - At least 3 B (as standard norm ASTM D 3359 - 02);
 Glue Bond (ANSI/HPVA EF 2002);
 Formaldehyde emission - Less than 0.01ppm (ASTM D 6007 -2);
 Total VOC (CA Specification 01350) - ≤ 0.5 mg/m³;
 Critical radiant flux (Class 1) - 0.45watts/cm² (ASTM E648)

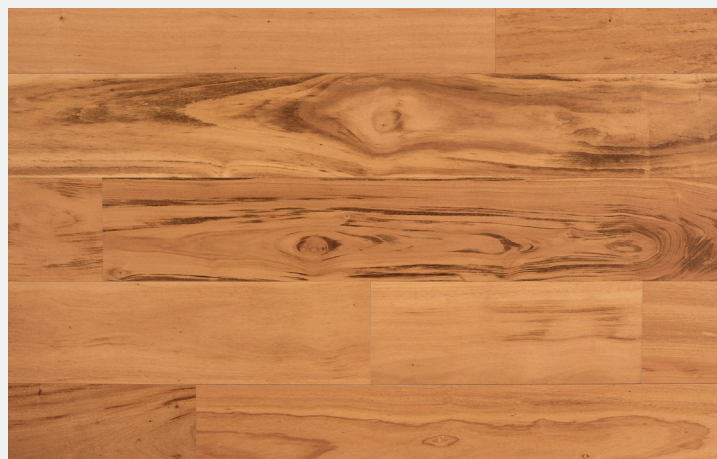

CONTACT US!

Phone : +1 (757) 420 4771
 Fax : +1 (757) 420 4772
 Email : sales@triangulo.com.br

Know more,
 click here:



triangulo.us